


# RRB ROAD BLOCKER

## (Reinforced Model)



<b>Power</b>	Standard 380V AC 3-Phase 50/60 Hz, 2,2 - 11 kW motor (varies depending on blocker size). Operating with 24V DC in case of power failure is optionally available.																
<b>Control Pack</b>	24V DC powered PLC control unit is placed in power unit cabinet. 24V DC (opt.12V DC / 220V AC) solenoids.																
<b>Speed</b>	Standard operation ~3 - 5 sec. (ascend/descend) depending on road blocker dimensions. Fast raise up (EFO, by optional hydraulic accumulator) ~1 - 1,5 sec. and may differ depending on road blocker dimensions for road blockers wider than 4,0 m.																
<b>IP Rating</b>	IP55 - Hydraulic Power Unit IP67 - Electronics Control Unit with IP67 housing/box protection (optional) IP68 - Hydraulic Piston																
<b>Operating Temperature</b>	-5°C / +55°C (opt. -30°C / +70°C)																
<b>Crash / Impact Rating</b>	Designed and produced to withstand impacts mentioned below:																
	<table border="1"> <thead> <tr> <th>Standard</th> <th>Vehicle Type</th> <th>Weight</th> <th>Speed</th> </tr> </thead> <tbody> <tr> <td>ASTM F2656</td> <td>M, C7 (K-8)</td> <td>6800, 7200 kg</td> <td>64 km/h (40 mph)</td> </tr> <tr> <td>PAS 68</td> <td>N2, N3</td> <td>7500 kg</td> <td>64 km/h (40 mph)</td> </tr> <tr> <td>IWA 14-1</td> <td>N2A, N2B, N3C</td> <td>7200 kg</td> <td>64 km/h (40 mph)</td> </tr> </tbody> </table>	Standard	Vehicle Type	Weight	Speed	ASTM F2656	M, C7 (K-8)	6800, 7200 kg	64 km/h (40 mph)	PAS 68	N2, N3	7500 kg	64 km/h (40 mph)	IWA 14-1	N2A, N2B, N3C	7200 kg	64 km/h (40 mph)
Standard	Vehicle Type	Weight	Speed														
ASTM F2656	M, C7 (K-8)	6800, 7200 kg	64 km/h (40 mph)														
PAS 68	N2, N3	7500 kg	64 km/h (40 mph)														
IWA 14-1	N2A, N2B, N3C	7200 kg	64 km/h (40 mph)														
	(Please contact for applicable product dimensions.)																

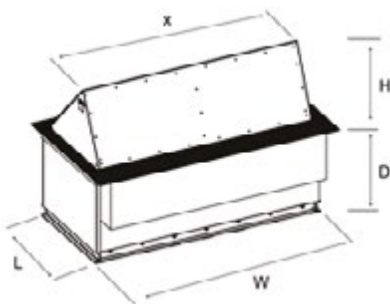

Product Code	Blocker Unit Width (X)	Nr. of Pistons	Raising Height 600 mm	Raising Height 900 mm
			Dimensions (LxWxD)	Dimensions (LxWxD)
RRB 10F_	1000	1	1255 x 1170 x 975	1665 x 1170 x 1270
RRB 15F_	1500	1	1255 x 1670 x 975	1665 x 1670 x 1270
RRB 20F_	2000	1	1255 x 2170 x 975	1665 x 2170 x 1270
RRB 25F_	2500	1	1255 x 2670 x 975	1665 x 2670 x 1270
RRB 30F_	3000	1	1255 x 3170 x 975	1665 x 3170 x 1270
RRB 35F_	3500	1	1255 x 3670 x 975	1665 x 3670 x 1270
RRB 35F_	3500	2	1255 x 3670 x 975	1665 x 3670 x 1270
RRB 40F_	4000	1	1255 x 4170 x 975	1665 x 4170 x 1270
RRB 40F_	4000	2	1255 x 4170 x 975	1665 x 4170 x 1270
RRB 45F_	4500	2	1255 x 4670 x 975	1665 x 4670 x 1270
RRB 50F_	5000	2	1255 x 5170 x 975	1665 x 5170 x 1270
RRB 55F_	5500	2	1255 x 5670 x 975	1665 x 5670 x 1270
RRB 60F_	6000	2	1255 x 6170 x 975	1665 x 6170 x 1270

\* Different raising heights are optionally available.

<b>Axle Load Resistance</b>	50 t
<b>Hydraulic Cylinder Unit</b>	Dust sealed hydraulic cylinder, developed for heavy duty use. 1 - 4 m wide models contain single piston (opt. 3,5 and 4 m wide models contain double pistons). 4,5 - 6,0 m wide models contain double pistons. Contains safety valve for hose bursts.

## Hydraulic Power Unit and Cabinet

Strengthened industrial hydraulic pump.  
 40 - 120 lt capacity oil tank with magnetic metal collector and suction filter.  
 Built-in oil level and oil temperature indicator.  
 Standard 70 - 150 bar pressure (max. 180 bar).  
 10 m R2 type (double wire braided mesh) reinforced hydraulic hose.

Motor, hydraulic pump and solenoid valves are placed in an easily accessible hot-dip-galvanized and electrostatic powder coated steel cabinet with a built-in lock lid (opt. stainless steel cabinet).



Cabinet Type	Width (mm)	Length (mm)	Height (mm)
Cabinet 1	940	570	970
Cabinet 2	1040	590	1285
Cabinet 3	1243	840	1285

\*Suitable cabinet type is selected according to the preferred product configuration.

## System

Down, up, stop, emergency inputs and external sensor inputs/outputs (e.g. loop detector, safety sensor, traffic light, remote control, etc.).  
 System alerts with an audio signal during lowering and raising operation. A loud siren alert in case of alarm or emergency.  
 System stops in case of emergency as per default set-up and possible to be lowered or raised automatically (user's preference).  
 Can be lowered and raised manually in case of power failure or during maintenance with manual pump and manual valve feature.  
 Automatic raise up mode deploys (available with optional loop detector) the road blocker after the vehicle has passed over.  
 Sensor controlled stopping both at the top and bottom positions of the blocker unit.  
 Free standing piston connection structure that does not put any load on the piston during vehicle passage and in case of an impact.  
 Safety devices (if any, such as; safety sensor, loop detector, etc) are enabled in case fast raise up (EFO, optional) feature is activated and they can be optionally disabled.

## Blocker Unit (Underground Unit)

All parts are coloured with industrial paint with two components over anticorrosive primer application.  
 Body is structured and strengthened with U-shaped beams. Contains galvanised steel sleeve around main chassis.  
 Product is designed that no vehicle crashing effect can displace it after embedded or installed in to the ground.

## Blocker Unit (Impact Blocking Unit)

Top plates (vehicle pass through surface) are hot dip galvanised and electrostatic powder coated.  
 All other parts are coloured with industrial paint with two components over anticorrosive primer application.  
 Moving parts are colored with RAL 1003 yellow (impact surface yellow-black) and fixed road surface plates in RAL 9005 black. In addition, the impact surface is finished with reflective signs and warnings.  
 Bulge free hidden hinge structure below the ground level allows vehicles to pass over smoothly and quietly.  
 Impact blocking unit is made of special, reinforced, 6 mm thick vertical impact load distributing panel construction assembled to the main chassis with 350 - 550 mm distance from each other. Each impact load distributing panel is supported with 4 pieces of 30 x 10 mm solid steel bars placed with equal distance from each other so that a strong steel construction has been designed.  
 Impacts are absorbed and blocked by impact load distributing panels together with 6 mm thick steel bars attached to their front sides and specially formed hook type holders.  
 Top panels where the vehicles pass over are made of 8 / 9 mm thick hot-dip galvanized steel with non-skid surface.  
 The system moves up and down as a block through Ø50 mm stainless steel hinges of which quantity varies according to blocker width (a 3 m wide blocker contains 7 pieces of hinges).  
 Impact blocker unit raises with 45° angle from the ground level and equipped with optional flashing indicators on the front panel.  
 A top lid integration is available for easy access to interior units for service and maintenance purposes.

## Control System

3 buttons for up, down and stop operations and 1 button for emergency stop are contained in an IP67 box (optionally, 1 button for EFO-fast raise up).  
 System stops its movement with the command from safety sensor (opt.) and loop detectors (opt.).  
 Contains built-in LED indicators and 10 m cable.  
 The system works with PLC as standard.  
 Status of safety sensors (if any) and loop detectors (if any), position and movement of the blocker and low oil level situation of the system can be monitored with optional PLC with diagnostic display.  
 Compatible with any access control system (by third parties).



## Power-off Situation

Road Blocker remains in its position in case of power-off. Optionally; can be lowered or raised and lowered by battery pack with 24V DC motor. Battery pack provides min.100 movements (50 deploy + 50 retract) when fully charged.

## Optional Features and Accessories

Hydraulic accumulator for EFO-fast raise up (1 piston or 2 pistons systems), 24V DC motor in case of power failure (50 deploy + 50 retract), oil heater (for oil tank), oil cooler, heater for electronic components, submersible pump, traffic light (Ø200/300 mm, red-green LED, electrostatic powder coated over 304 grade stainless steel body), traffic light pole (electrostatic powder coated over hot dip galvanised steel), loop detector (double contact), safety sensors (with 50 cm height poles), IP67 box (for PLC, SMPS, connectors etc inside power unit), wireless remote control (receiver and transmitter), external buttons, hot dip galvanization, double effect hydraulic unit, double speed hydraulic unit, PLC with diagnostic display, front flashing indicators, oil level sensor, different product dimensions.

## Installation

Installation with C30 grade concrete and steel rebar reinforcement. Ground levelling and preparation works shall be carried on before pouring the concrete. Allowable bearing value of the ground shall be minimum 1/2 kg/cm<sup>2</sup>, if not, works shall be carried on to fulfil. Installation shall be done according to the manufacturer's instructions.



**UDH**

**T.C.**

**Ulaştırma Denizcilik ve  
Demiryolları Bakanlığı**

**DUR**



**DUR**



