


Dimensions (mm)

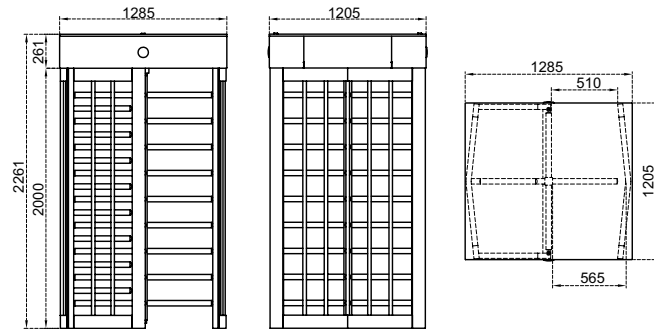

### Technical Features

<b>Place of Use</b>	Indoors, outdoors
<b>Operating Temperature, Humidity</b>	-20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.
<b>Operating Intensity</b>	100%, 7/24 use.


Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled.


Four-section rotor (90°), each having 9 (10 in optional 2120 mm clear passage height) one by one demountable arms. Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.

Combination options with different material choices:


Body / Arm Features	BT 402	BT 402-25	BT 402-100
<b>Body</b>	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel
<b>Arms</b>	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.

(\*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).

<b>Indicators / Illumination</b>	<b>Status - Direction Indicators :</b>  LED, standard/LED passageway illumination standard.
<b>Power</b>	<b>Operating Voltage :</b> 110/220V AC 50/60 Hz. (±10%), 24V DC. <b>Consumption :</b> ~8,1W at stand-by, during passage ~7,6W (varies according to the options and accessories used).
<b>Operating Modes</b>	System operates bi-directionally (entry-exit). Operating modes can be adjusted through the buttons and screen on the control card. Entry - exit controlled                      Entry controlled, exit free                      Entry free, exit controlled Single input both directions use                      Entry - exit free
<b>Operating System</b>	Electromechanical manual operation (opt. electromechanical motorized operation).
<b>Control System</b>	All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.
<b>Flow Rate</b>	<b>Passage capacity (manual) :</b> max. 48 cycle/min. <b>Nominal :</b> ~25 pass/min. <b>Passage capacity (motorized) :</b> max. 40 cycle/min. <b>Nominal :</b> ~20 pass/min. (nominal passage rate can change depending on the access control system utilized)
<b>Emergency Mode</b>	System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.
<b>Power-off Situation</b>	System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction by manual override key in fail secure option is available.
<b>Weight</b>	~235 kg
<b>Optional Features and Accessories</b>	Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, trombone arms, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.

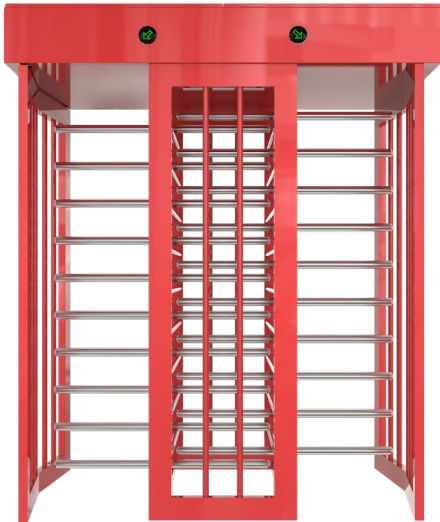

Dimensions (mm)

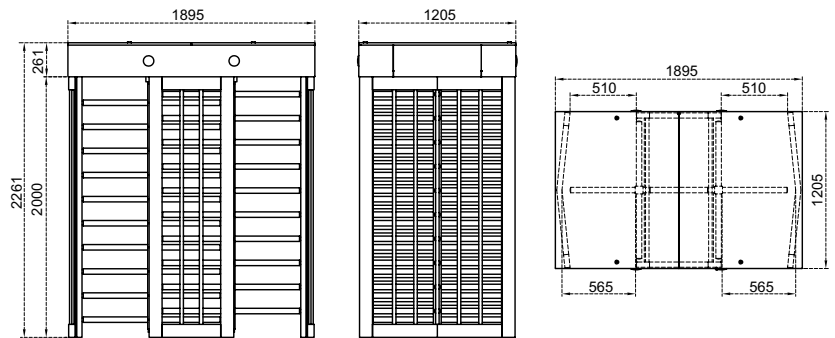

### Technical Features

**Place of Use** Indoors, outdoors

**Operating Temperature, Humidity** -20°C/+68°C (opt. -50°C with heater positive), RH 95% non-condensing.

**Operating Intensity** 100%, 7/24 use.

Built on main carriers and supported with pipe beams on sides, consisting of waterproof and protected top lid, mechanical compartment side panels and completely closed ceiling. Can be completely disassembled.

A pair of four-section rotors (90°), each having 10+10 (11+11 in optional 2120 mm clear passage height) one by one demountable arms.

Optionally complies with UK H&S regulation of ≤98 mm gap between upright profiles.

### Body / Arm Features

Combination options with different material choices:

	BT 402 D	BT 402 D-25	BT 402 D-100
<b>Body</b>	Electrostatic powder coating on hot-dip galvanized steel	Electrostatic powder coating on hot-dip galvanized steel	304 grade (opt. 316 grade) stainless steel
<b>Arms</b>	Electrostatic powder coating on hot-dip galvanized steel, Ø42x2,5 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.	304 grade (opt. 316 grade)* stainless steel, Ø40x2,0 mm.

(\*) Finishing : Satine brushed (opt. electrostatic powder coating on stainless steel).

**Indicators / Illumination** **Status - Direction Indicators** : LED, standard/LED passageway illumination standard.

**Power** **Operating Voltage** : 110/220V AC 50/60 Hz. (±10%), 24V DC.  
**Consumption** : ~16,2W at stand-by, during passage ~7,6+7,6W (varies according to the options and accessories used).

**Operating Modes** System operates bi-directionally (entry-exit).  
Operating modes can be adjusted through the buttons and screen on the control card.  
Entry - exit controlled      Entry controlled, exit free      Entry free, exit controlled  
Single input both directions use      Entry - exit free

**Operating System** Electromechanical manual operation (opt. electromechanical motorized operation).

**Control System** All functions, parameters and operating modes can be adjusted through the buttons and screen on the control card.  
All inputs are opto-coupler protected.  
Controllable by dry contact (ground control).  
Compatible with all kinds of access control device.  
Optional RS232, RS485 or TCP/IP module is available.

**Flow Rate** **Passage capacity (manual)** : max. 96 cycle/min. **Nominal** : ~50 pass/min.  
**Passage capacity (motorized)** : max. 80 cycle/min. **Nominal** : ~40 pass/min.  
(nominal passage rate can change depending on the access control system utilized)

**Emergency Mode** System allows free passage (entry-exit) in both directions (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.

**Power-off Situation** System allows free passage (entry-exit) in both directions (fail safe). Optionally, can be set (fail secure) as; entry-exit locked, entry free-exit locked, or entry locked-exit free. Free passage in chosen direction ~by manual override key in fail secure option is available.

**Weight** ~460 kg

**Optional Features and Accessories** Motor driven unit, wireless remote control (receiver-transmitter), manual control, manual override key (with fail secure option), counter (with/without reset), card reader mounting bracket, passage completion sensor, contactless passage sensor (for motorized models), heater positive, canopy, bottom plate (standard or for forklift handling), battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, limiter, 2120 mm clear passage height, mechanics compartment accessibility from the ceiling, different color choices, compliance with UK H&S regulation of ≤98 mm gap between upright profiles.